

11-14-00 A

**PATENT APPLICATION TRANSMITTAL LETTER**  
(Small Entity)

Docket No.  
FRY-00104/29

TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

William R. Fry

For: **SPORTS COMPUTER WITH GPS RECEIVER AND PERFORMANCE TRACKING CAPABILITIES**

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. EF081130082US
- ☒ Three (3) formal sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☐ Verified Statement(s) to Establish Small Entity Status Under 37 C.F.R. 1.9 and 1.27.
- ☐ Other:

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	4	- 20 =	0	x \$9.00	\$0.00
Indep. Claims	1	- 3 =	0	x \$40.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$355.00
TOTAL FILING FEE					\$355.00

- ☒ A check in the amount of \$355.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. 07-1180 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: Nov. 10, 2000

Signature

John G. Posa  
Reg. No. 37,424  
Gifford, Krass, Groh et al  
280 N. Old Woodward Ave., Suite 400  
Birmingham, MI 48009  
Tel. 734/913-9300

CC:

## **SPORTS COMPUTER WITH GPS RECEIVER AND PERFORMANCE TRACKING CAPABILITIES**

### Reference to Related Applications

This application is a continuation-in-part of U.S. patent application Serial No. 09/459,736, filed December 13, 1999, which is a continuation of U.S. patent application Serial No. 08/742,373, filed November 1, 1996, now U.S. Patent No. 6,002,982, the entire  
5 contents of all of which are incorporated herein by reference.

### Field of the Invention

The present invention relates generally to computer-based systems of the type which display speed, used for sports training purposes, and, more particularly, to a system including a GPS receiver and means for transferring measurements to a personal computer to facilitate  
10 the tracking and mapping of route and athlete performance parameters.

### Background of the Invention

Sports-related measurement systems have grown dramatically in sophistication, over the years. With respect to bicycling, such systems have evolved from older, heavy speedometers, and the like, to modern electronic units capable of monitoring and displaying  
15 a number of performance characteristics.

So-called bicycle computers, which for example, track and electronically display speed, distance, and so forth, are now common in the art. The following examples are

illustrative of known systems of this type. In U.S. Patent 4,642,606, entitled "DATA  
DISPLAY UNIT FOR A BICYCLE" to Tsuyama, there is disclosed a handlebar-mounted  
display unit to which a wheel and crank sensor are communicatively interfaced, affording the  
calculation of running data such as speed, distance, average speed, maximum speed and so  
5 forth, based upon electrical pulses received from the wheel and crank sensors. U.S. Patent  
4,862,395 entitled "DATA DISPLAY INSTRUMENT FOR A BICYCLE" to Fey et al.  
includes most of the same features of the device of Tsuyama, but claims to improve upon the  
display by providing an analog scale field to display traveling speed and pedaling speed on a  
momentary, more readable basis. The '395 patent also includes a sensor associated with  
10 wheel rotation, and an additional sensor associated with pedal speed to determine cadence.  
In addition to the devices just described, others exist, both in patent literature and as  
commercially available products.

Bicycle computers also exist which have output ports enabling the device to be  
interfaced to a commercially available personal computer. The invention, A BICYCLE  
15 COMPUTER WITH MEMORY AND MEANS FOR COMPARING PRESENT AND PAST  
PERFORMANCE IN REAL TIME, disclosed in U.S. Patent 5,335,188 to Brisson, for  
example, discloses a device for monitoring and comparing present, past and ideal  
performance on an exercise machine such as a bicycle. The system operates under a  
predetermined set of user-controlled instructions, to store a set of performance data in  
20 memory, which can then be compared against a stored, user selected performance data.  
Comparisons among these various data sets may then be displayed.

The exercise computer of Brisson includes a connector (65) for linking to an external computer, but the capabilities involved are extremely limited. In one example given, data in the memory of the computer itself may be transmitted to the external computer for "safekeeping," then transferred back to the cycle computer at a later time. The specified  
5 purpose is to ensure that the data are not lost should the memory suffer from a power failure, should the cycle computer be stolen. Alternatively, if the user rides on many different routes, the cycle computer may not have enough memory to save all ride data, in which case the connector (65) may be used to transfer a larger number of pace files to an external computer such as a PC. Thus, according to the '188 patent, although a computer interface is provided,  
10 it is essentially limited in function to that of a memory expansion port.

Despite the various speed, distance and cadence functions available through existing cycle-mounted computers, none receive geographical coordinates through, for example, a global positioning satellite (GPS) receiver. Although a variety of vehicle-oriented tracking and mapping systems do exist which include GPS capabilities, none exist for bicycles.  
15 However, the inclusion of such a capability within a bicycle computer provides a number of unique advantages, as will be explained in the sections herein detailing the instant invention.

As one such advantage, by utilizing an additional satellite to obtain altitude as well as longitude/latitude coordinates, the cyclist may be provided with elevation as well as geographic location information, which may be particularly useful in determining  
20 performance, endurance, and other characteristics. Moreover, by obtaining and storing position and/or altitude information, these characteristics may be tracked in terms of location

and/or altitude, enabling the cyclist to visualize speed, cadence and other external and/or physiological characteristics as a function of geographical position, further allowing performance attributes to be tracked and plotted, for example, on an external personal computer. By combining GPS capabilities with the various functional and performance  
5 monitoring and tracking capabilities disclosed herein, the rider may not only visualize performance as a function of geometry, including incline, but will also be more equipped to optimize performance, by determining when cadence, gearshifting, and other riding changes were, or should have been, executed.

#### Summary of the Invention

10 The present invention improves upon the prior art by providing a sports computer having an integral global satellite positioning (GPS) receiver and computer interfacing capability, enabling functional and/or performance characteristics to be tracked and analyzed as a function of geographical position and/or elevation. Though the descriptions herein focus on a bicycling implementation, the invention is readily applicable to other sports involving  
15 travel over time, regardless of the equipment involved, including running, rowing, kayaking, gliding, etc. In a cycling application, for example, in addition to sensors for vehicle speed and cadence, the invention further includes, in alternative embodiments, sensors for heart rate, and weather conditions such as temperature and wind speed/direction.

In a preferred embodiment, the device according to the invention includes means for  
20 mounting an enclosed mobile computer system directly to the athlete or equipment in use,

with interfaces to one or more sensors which measure performance characteristics. A GPS receiver and small antenna are also included within and on the device, enabling the geographical information to be gathered and stored therein. Preferably the receiver communicates with sufficient satellites to determine altitude information as well as  
5 longitudinal and latitudinal coordinates. The device according to the invention includes sufficient memory to store geographical coordinates on a periodic basis, even for a long-term use, which may constitute several days.

Also in a preferred embodiment, the inventive device is capable of being interfaced to an external computer such as a personal computer (PC), including a laptop computer, so that  
10 the data collected during a workout may be reviewed and analyzed on the screen of the PC. Preferably, map data may also be stored, either in the mobile aspect of the invention or, more conveniently, within the PC on CD-ROM, enabling the collected data to be viewed relative to the map information, for example, in superposition with respect thereto.

In addition to the inclusion of a GPS receiver capability, in alternative embodiments,  
15 the invention may optionally include a heart-rate sensor, preferably in the form of a chest or appendage pressure sensor, as well as weather condition sensors to provide temperature and/or wind speed/direction indications. Such parameters, if collected, are also stored along with, and in conjunction with, the GPS information for later review on the personal computer. The mobile aspect may either be left on the equipment used by the athlete, with  
20 the collected data being removed on a computer-accessible module or card containing a non-volatile memory in some form, whether inherently or through battery back-up. As an

alternative, the mobile unit may be disconnected from its sensor inputs and removed for relocation proximate to the PC, with the data being accessed through a connector joining the PC to the mobile unit.

#### Brief Description of the Drawings

5           FIGURE 1 is an oblique drawing of a sports computer according to the invention for cycling use, including a GPS receiver and a comprehensive complement of other functional, physiological and external condition sensors;

FIGURE 2 is a block diagram of a sports computer according to the invention, including major electrical subsystems and connections therebetween;

10           FIGURE 3 is a flowchart used to indicate major subroutines and other operations performed by a software aspect of the invention; and

FIGURE 4 is a drawing as seen from an oblique perspective which shows a sports computer according to the invention removed from its mobile mounted state and connected to a personal computer to view route information and performance characteristics through

15           pull-down menus associated with various points along a particular workout route.

#### Detailed Description of the Preferred Embodiment

Reference will now to be made to the accompanying figures, wherein like reference numerals refer to like elements, though such elements may be present in more than one drawing. Figure 1 illustrates, from an oblique perspective at 100, a bicycle 102 having

mounted thereon a bicycle computer 104 according to the invention. With the exception of sensors and associated hardware, the electrical subsystems are contained within an enclosure mountable on the bicycle 102, preferably in the form of a cradle 106 within which the enclosure 104 is releasably held for mobile use, yet enabling the enclosure to be detached  
5 therefrom for computer interfacing, as best understood with reference to Figure 4.

On the enclosure 104 there is supported an operator control including a set of mode switches 108 and a display 110, preferably based upon low-power liquid-crystal display (LCD) technology. Various sensors are interfaced to the computer contained within the enclosure 104, preferably through a connector common to all such connections, enabling the  
10 enclosure 104 to be most conveniently detached and removed from the cradle 105 for the downloading of the data collected during a particular ride. At the very least, the system includes a speed sensor 112 attached to the computer electronics via cable 113, which attaches to a connector point on the enclosure 104 (not visible in the drawing). In the preferred embodiment, a crank speed sensor 114 is also included, this being connectable to  
15 the computer electronics via cable 115. Although different sensing technologies may be used, this invention preferably uses moving magnets which induce a signal into a stationary sensor mounted appropriately on the bike frame containing a lead switch as in the '606 patent to Tsuyama, or, more preferably, a Hall-effect sensor. With sensors 112 and 114 for wheel speed and crank speed, respectively, various aspects may be monitored or computed,  
20 including speed, cadence, distance traveled, and time/distance remaining if terminal trip parameters are entered. Additionally, with wheel rotation and crank rotation being known,



gear ratio may also be computed, that is, the gear settings used by the rider at that point in time. As an alternative to the use of a discrete crank sensor, according to the invention, since the system is capable of determining ground speed and gear ratio, pedal revolutions per minute may be calculated. An additional sensor may be used to sense what gear the bike is in, with the software preferably allowing for the ability to input or change gear set, as serious riders typically have more than one set. In addition to speed and cadence sensing, a heart rate monitor may be included, preferably in the form of a chest or appendage pressure sensor or, alternatively, in the form of a finger cot 116, facilitating a very short connection 117 to be made to the enclosure 104.

10 In addition to sensors which measure cycle functional or operational characteristics and rider physiology, additional sensors may be provided according to the invention to determine weather conditions. In particular, a temperature sensor 120 may be mounted on an outer surface of the enclosure 104, preferably with appropriate wind shielding to guard against false readings. Additionally, an optional wind sensing apparatus including a wind direction indicator 122 and wind speed monitor 124 may be provided on a mount 126, either  
15 emanating from the enclosure 104 or mounted elsewhere on the bike, preferably away from the rider, again, so that the existing wind pattern is not disturbed. Although, obviously, as the bike travels at high speed in a particular direction, accurate indications of wind direction and speed would not be possible. However, since, for reasons explained below, the rider's  
20 direction and speed may be known or computed, the effects of bicycle movement may be subtracted from those of the indicators 122 and 124 to obtain wind-related readings which at

least approximate existing weather conditions. In addition to the various sensors just described, other may be provided internal to the enclosure 104, and therefore not visible, such as an electronic compass which, as described above, may be interfaced to the wind detection sensors to subtract bicycle movement effects for a more accurate reading.

5 Continuing the discussion of Figure 1, also supported on the enclosure 104 is a global positioning satellite (GPS) antenna which interfaces to a GPS receiver, the functioning of which is better understood with reference to Figure 2. The antenna 130 interfaces to a GPS receiver 210 which connects to central controller 220 via signal lines 222. Although the receiver 210 may be constructed from discrete components, in the preferred embodiment, the  
10 receiver 210 is implemented using a "signal-chip" GPS receiver which have recently become commercially available from various manufacturers. Signal lines 222 include power-up/satellite locating signals from the processor 220, as well as positional information which is delivered to the processor 220 via an interrupt structure, better understood with reference to the flowchart and text accompanying of Figure 3. The controller 220 is preferably a  
15 single-chip microcomputer of conventional design, implemented using C-MOS technology to consume the least amount of power during use, which is provided in the preferred embodiment through a rechargeable battery pack 224. Timing for the microcomputer controller 220 is preferably provided by a crystal-controlled clock 221. Though not shown in the figures, optional solar cells may also be used as a primary power source or to charge the  
20 batteries 224 during use.

Also interfaced to controller 220 is a memory 226 into which geographical

information received from the GPS receiver electronics 210 is stored, along with information received and decoded, if necessary, from the various sensors, depending upon the overall configuration. In the preferred embodiment, the memory 226 uses one or more C-MOS random-access memories, again, to conserve power. The memory 226 may either be  
5 removable on a board or card 228 and transferred to a personal computer for downloading in that manner, thus requiring that the memory 226 be rendered non-volatile, either inherently, as in the form of an electrical an electrically erasable programmable read-only memory (EEPROM), for example, or through the use of a battery (not shown) for back-up purposes.

As an alternative to this means for transferring collected ride data to a personal  
10 computer, such information may be downloaded through PC port 230, in which case the entire cycle computer enclosure 104 would be removed from its carrying mechanism and placed proximate to the personal computer for access thereby, as best seen and described with reference to Figure 4.

Now making reference to Figure 3, there is shown generally at 304 a flowchart  
15 representative of major software routines executed by controller 220 contained within the enclosure 104 of a bicycle computer according to the invention. Although Figure 3 does not provide a functional block for all steps executed by the computer, the following description will enable one of ordinary skill in the art of microcomputer programming to write code for all of the routines involves. Upon power-up, the controller executes an initialization routine  
20 identified at block 306, wherein, in particular, the GPS receiver 210 cycles through its satellite-finding routine, a requirement to all such GPS subsystems. Also at this stage, the

controller may test to see which sensors are connected, as well as perform other input/output (I/O), memory-management functions, and so forth.

Next, at block 310, the controller scans the mode switches 108 to determine if a change in desired functionality has occurred. At block 314, for example, the controller  
5 checks to see if the system has been reset, in which case the contents of memory 226 may be cleared on a global or selective basis, preferably in accordance with operator responses to queries presented on the display 110. If there has been a change in display mode, as signified with block 318, appropriate parameters will be loaded so that, at the execution of the update display block 360 as described below, the parameters desired by the operator will be  
10 displayed, be they geographic position, speed or physiological or weather conditions, or any combination thereof, depending upon configuration. As a further option, at block 322, another one of the switches 108 may be chosen so that distance and speed read-out may be in English or metric, in accordance with the operator's preference. It should be clear that, in accordance with available hardware options, additional mode-related commands may be  
15 executed in response to an affirmative answer to the question at block 310. Having attended to mode-related functions, the controller next executes the most time-critical routines, preferably in the form of interrupts, followed by a scanning of less-time critical sensor inputs, after which the display is updated in accordance with new and previously stored parameters. More particularly, at block 330, if, through a mode selection, a GPS position is  
20 to be received, an interrupt is generated, and the new coordinates are computed at block 34 and stored in memory at block 338. Although updating the GPS coordinates may take place

on a non-interrupt basis, the received coordinates would have to be maintained in a buffer until servicing, potentially adding additional, unnecessary hardware.

Next, in a preferred embodiment, the controller next inputs signals received from time-based sensors, if updates are warranted in response to block 340. If so, such inputs, which include vehicle speed, crank rate, the cyclist's heart rate, and so forth are decoded at block 342 and stored in memory of block 346. Again, these being time-based inputs, they are preferably received in the form of an interrupt to avoid unnecessary buffering. Although, in certain cases, one or more of these signals may be missed, for example, in the event of a contemporaneously received GPS input, the system can easily extrapolate through the missing inputs and catch up on an accurate rate and readout, and store information representative of the missed signals in the memory for later display and analysis on the personal computer.

At block 350, less time-critical sensors are simply scanned by the controller. These include internal electronic compass heading, weather sensors and so forth, which do not change on a time-critical or even periodic basis. Thus, in these cases, the sensors are simply scanned after time-critical interrupts are first serviced. At block 360, the least critical function takes places, that is, the display is updated by refreshing from memory the data to be displayed in accordance with the mode selected. In other words, a portion of the memory may be set aside and utilized as a buffer for the display. After updating the display at block 360, the software loops back to the mode-selection inquiry at block 310, and the various routines are repeated, or skipped, in accordance with mode and the existence of

various inputs.

Now making reference to Figure 4, there is shown generally at 402, the situation wherein the computer 104 has been removed from its holster 105 and connected to a personal computer 420 through an interface cable 410 designed for this purpose. Another cable, 406, is preferably interfaced to the computer 104 to provide power during the downloading process which will now be described, and to recharge the batteries internal to the unit 104. As mentioned, although in the following discussion the entire computer 104 has been removed in interface to the personal computer 420, in an alternative embodiment, the unit 104 may remain attached to the bicycle, with a card being removed therefrom having ride parameters stored thereon, inserted into or in some way interfaced to the personal computer 420. As just one example, the so-called PCM CIA cards may be utilized for such a purpose.

In any event, with the contents of the computer 104 being interfaced to the personal computer 420, an application program according to the invention may be loaded into the computer 420, through a diskette port 423, for example, enabling the route taken by a particular ride to be displayed as a plot 438, preferably superimposed over a map 432 on the display 426 of the PC 420. Although the invention may be used without such map data, for example, by simply listing ride characteristics as a function of geographical positioning, the inclusion of maps for superposition of the ride and characteristics as described below, provides for a much more exciting and user-friendly interface. Such map data are becoming increasingly available for a variety of useful applications, and may conveniently be input to the system via CD-ROM port 432, containing the appropriate map data.

Although ride characteristics may be displayed in a number of ways, in the preferred embodiment, pop-up menus 444 appear in response to an operator clicking with a pointing device 450 on a point of the path 438. Preferably, such menus 444 contain the information present at that point along the ride, including detailed geographical information, along with  
5 altitude, plus any other bicycle operation, cyclist physiological or external condition sensing that took place at that point or the point closest to that selected by the user.

As an alternative to the map-based display shown on the display screen in Figure 4, if altitude information is available, it may be more elucidating to plot altitude along with other ride characteristics, particularly if the cyclist is more interested in improving his or her  
10 technique than seeing where they went. In other words, by plotting altitude and connecting the various points to show ride incline, and by plotting in a concurrent, synchronized manner the cyclist's heart rate, speed, gear ratio, and so forth, it may be easy to see how hard the cyclist was working as a function of incline, when and if the correct gears were being used, and so forth. It will be apparent to one of skill that other display modes are also possible  
15 according to the invention.

As a further alternative according to the invention, the performance of one or more individuals engaged in a sports activity may be forwarded to a centralized location, such as an Internet website, allowing each person to see "how they did" relative to the performance of others, thereby facilitating virtual races or other types of competitive events. As with the  
20 other embodiments disclosed herein, the person engaged in the activity would carry or wear a portable recording unit, which store geographical position and/or altitude, preferably using

GPS coordinates, enabling that user to review the route taken during the activity.

Other performance characteristics, such as speed, distance, and so forth, may also be monitored along with physiological parameters such as heartbeat, respiration, cardiac output, etc., as previously disclosed. Such information may either be stored in the portable unit for  
5 subsequent downloading into a stationary unit or transfer to a website or, alternatively, the portable unit may itself include the capability of transmitting to a website (i.e., by way of a wireless modem), thereby facilitating real-time monitoring.

Such an embodiment would allow individuals to rate their own performance while engaged in an activity on a particular race course, for example, or compete with others, either  
10 at the same or a different time. The ability to transfer results to a central location such as website, whether or not in real time, would also preferably allow others interested in that particular activity to monitor the achievements and results of others. To ensure a fairer starting time, the website itself could download instructions such as "ready-set-go," then monitor and record performance from that point on.

15 The invention is not limited to individual or "personal best" performance, but is applicable to individual competition and team sports, wherein, for example, each team member would don an appropriate portable unit. Thus, the invention is applicable to a wide variety of sports, including, but not limited to, running/jogging, swimming, baseball, football, basketball, soccer, skiing, and water sports.

20 In the event the sport includes an implement, such as hockey or ball-type sports, the implement itself may include its own sensor to determine position, velocity, and other



factors. In the case of a team sport, the implement may change color or another characteristic on the screen during a real-time or recorded screen display to indicate the team in possession at a given time. In the case of downhill skiing, for example, the actual, physical gates may include sensors to show if they have been touched.

5           In addition to the primary activity monitor worn or carried by the individual engaged in the sports activity, a user may optionally wear one or a plurality of sensors attached, for example, to the extremities, thereby allowing partial or full-body motion to be recorded and displayed, either locally by the user or, again, transmitted to a remote site enabling viewers to see a "stick figure" or even more animated version of an individual's performance.

10           In addition to the physiologic measurement capabilities already disclosed herein, the system may be used to monitor other parameters with appropriate sensors, as follows:

          heart rate,  
          ECG,  
          blood pressure,  
15       galvanic skin resistance for measure of total body water,  
          EEG,  
          inspired/expired oxygen concentration,  
          oxygen saturation,  
          carbon dioxide saturation, pressure, or output,  
20       respiratory rate,  
          cardiac output  
          tidal volume,  
          watts of energy expended, and  
          urine output.

25           In addition, although the system has been described primarily with respect to sports-related applications, other uses are possible. For example, in hospitals, nursing homes, or other skilled or semi-skilled care facility systems of the type described herein may be used to

FRY-00104/29  
00911sh

monitor individual patient's physiology and location. This could then be downlinked to an intranet or internet for remote viewing of a patient's condition from a computer terminal or internet-linked PDA, or cell phone by a health care provider.

I claim:

FRY-00104/29  
00911sh

1. A sports activity monitor adapted for use with a remote computer accessible  
2 through a network, comprising:  
a mobile recording unit adapted to travel with a user engaged in the activity, the unit  
4 including:  
a sensor for detecting a quantity which varies as a function of the activity,  
6 a global positioning (GPS) satellite receiver,  
a memory, and  
8 a controller connected to the sensor, the GPS receiver, and the memory, the controller  
being operative to perform the following functions:  
10 (a) receive a signal from the GPS receiver relating to the geographical position of the  
user while engaged in the sports activity,  
12 (b) store the geographical position information in the memory, and  
(c) receive a signal from the sensor and store information relating to the quantity in  
14 the memory; and  
an interface between the mobile recording unit and the remote computer, enabling the  
16 computer to display, over the network, the information relating to the quantity as a function  
of the geographical position of the user while engaged in the sports activity.

2. The sports activity monitor of claim 1, including a plurality of mobile  
2 recording units, each having an interface to the remote computer, enabling the computer to  
display, over the network, the information relating to the geographical position of each user


4 while engaged in the sports activity.

3. The sports activity monitor of claim 2, wherein the computer is operative to  
2 display the information relating to the geographical position of each user in real time while  
engaged in the sports activity.


4. The sports activity monitor of claim 2, wherein:  
2 the network is the internet; and  
the display is accessed through a website.

Abstract of the Disclosure

A sports computer having an integral global satellite positioning (GPS) receiver and computer interfacing capability enables functional and/or performance characteristics to be tracked and analyzed as a function of geographical position and/or elevation. The computer  
5 includes mounting means and/or interfaces to one or more sensors to measure operational and/or physiological parameters such as heart rate, or weather conditions such as temperature. Means are provided for downloading the stored geographical and sensor parameters to an external personal computer so that the data collected during a workout may be reviewed and analyzed on the screen of the PC. Preferably, map data may also be stored  
10 enabling the collected data to be viewed relative to the map information, for example, in superposition.

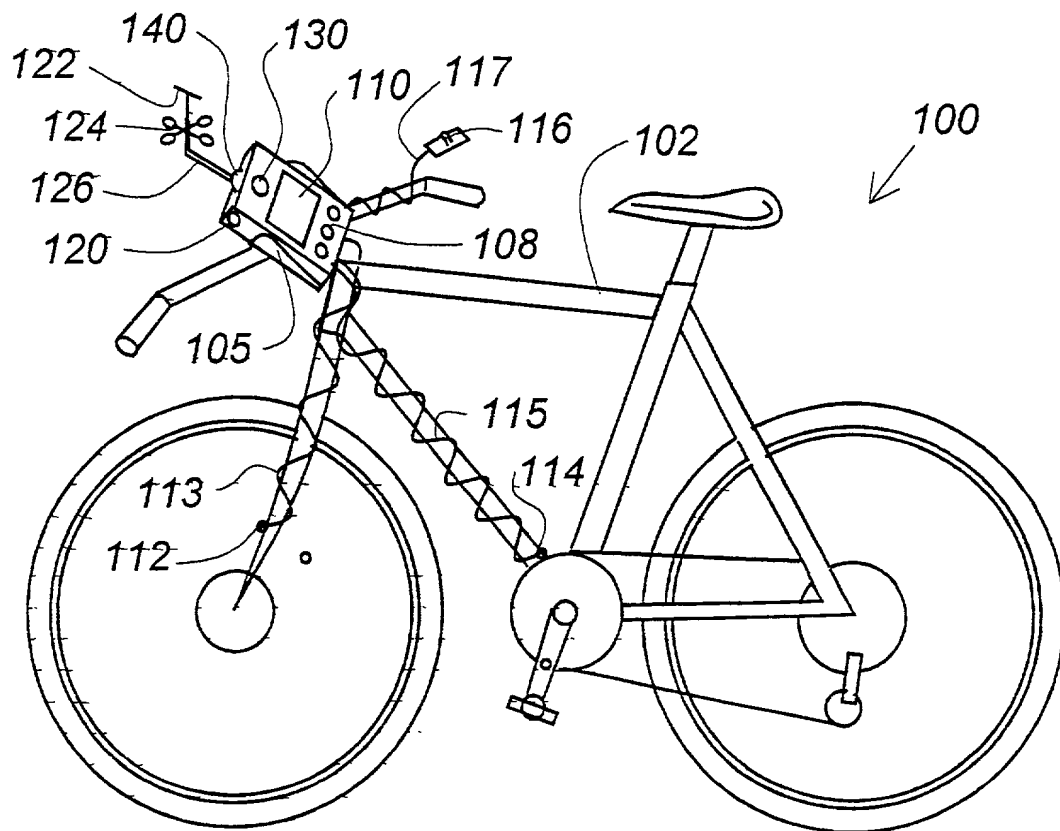

**Figure - 1**

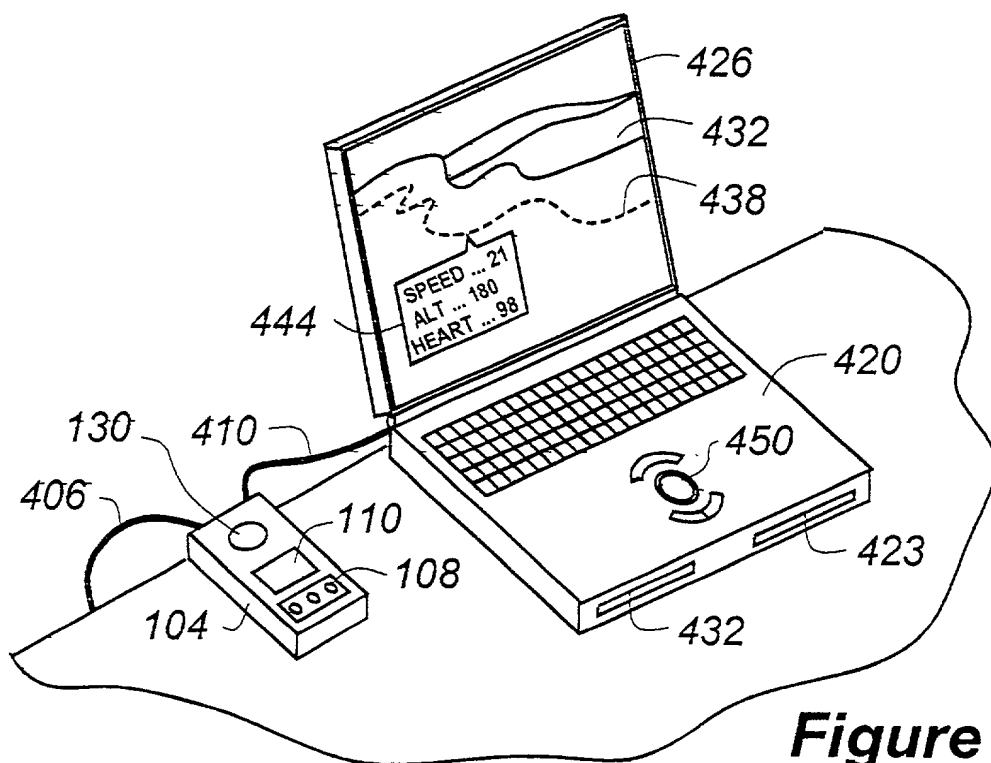

**Figure - 4**


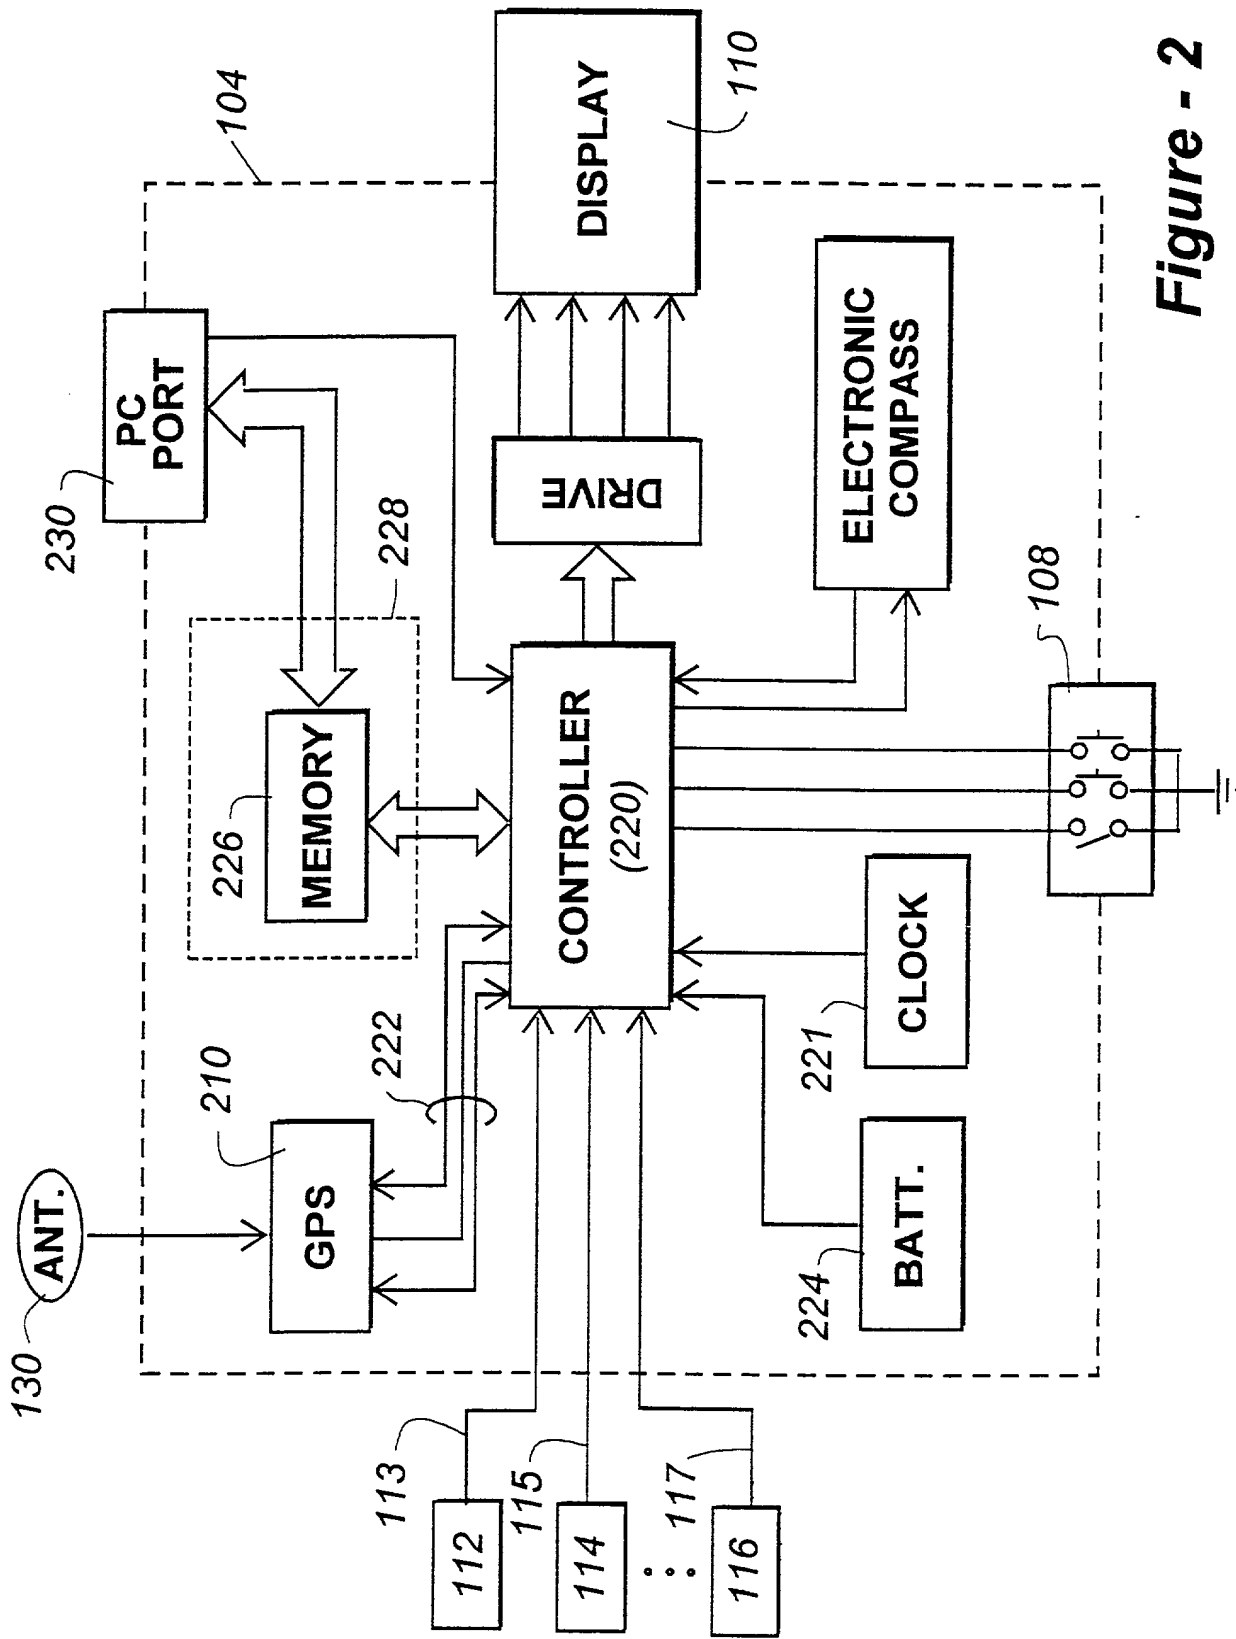


Figure - 2



**Figure - 3**

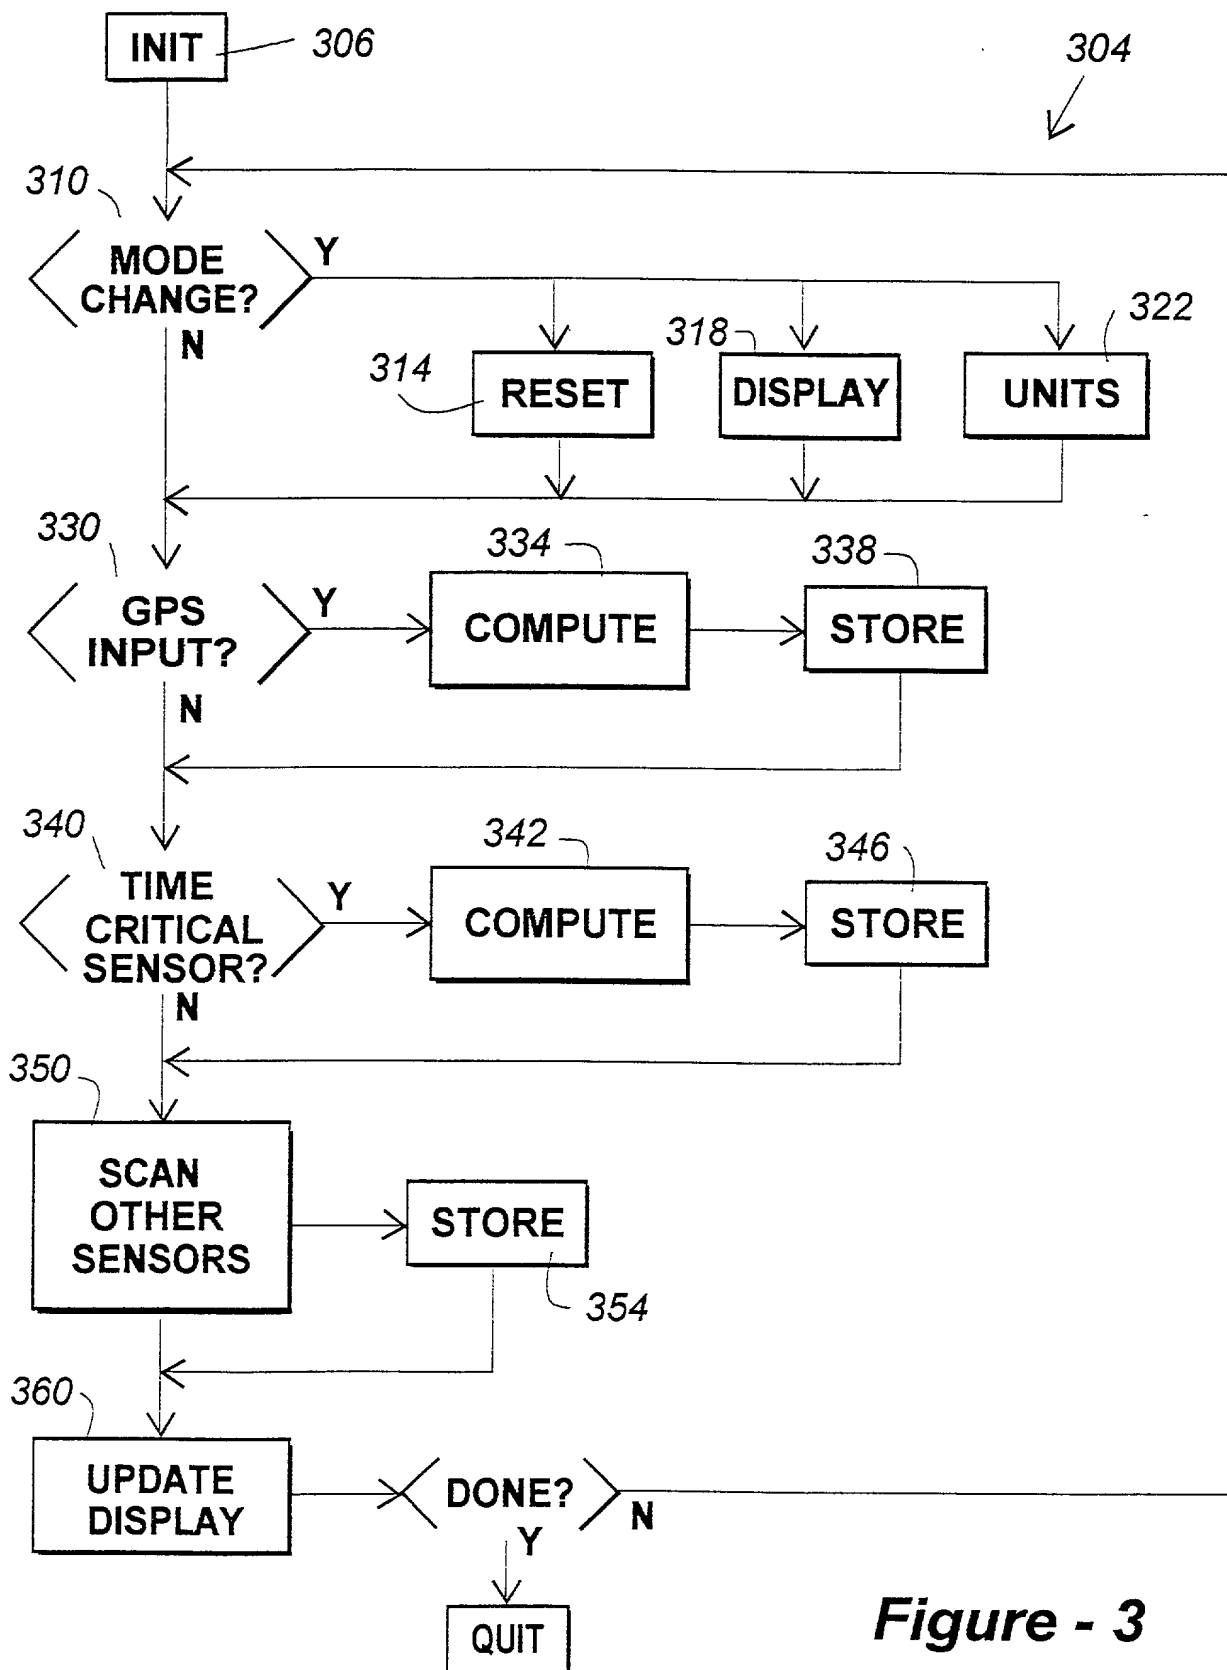

---

**COMBINED DECLARATION AND POWER OF ATTORNEY**

*(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT, SUPPLEMENTAL, DIVISIONAL,  
CONTINUATION OR CIP)*

---

As the below named inventor, I hereby declare that:

**TYPE OF DECLARATION**

This declaration is the following type:

- ☐ original
- ☐ design
- ☐ supplemental

*NOTE: If the declaration is for an International Application being filed as a divisional, continuation or continuation-in-part do not check next item; check appropriate one of last three items.*

- ☐ national stage of PCT

*NOTE: If one of the following 3 items apply then complete and also attach ADDED PAGES FOR DIVISIONAL, CONTINUATION OR CIP.*

- ☐ divisional
- ☐ continuation
- ☒ continuation-in-part (CIP)

**INVENTORSHIP IDENTIFICATION**

*WARNING: If the inventors are each not the inventors of all the claims an explanation of the facts, including the ownership of all the claims at the time the last claimed invention was made, should be submitted*

My resident, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

---

**SPORTS COMPUTER WITH GPS RECEIVER AND  
PERFORMANCE TRACKING CAPABILITIES**

---

**SPECIFICATION IDENTIFICATION**

the specification of which: *(complete (a), (b) or (c))*

- (a) ☒ is attached hereto.
- (b) ☐ was filed on \_\_\_\_\_ as ☐ Serial No. 0 / \_\_\_\_\_ or ☐ Express Mail No., as Serial No. not yet known \_\_\_\_\_ and was amended on \_\_\_\_\_ *(if applicable)*.

*NOTE: Amendments filed after the original papers are deposited with the PTO which contain new matter are not accorded a filing date by being referred to in the declaration. Accordingly, the amendments involved are those filed with the application papers or, in the case of a supplemental declaration, are those amendments claiming matter not encompassed in the original statement of invention or claims See 37 CFR 1.67*

- (c) ☐ was described and claimed in PCT International Application No. \_\_\_\_\_ filed on \_\_\_\_\_ and as amended under PCT Article 19 on \_\_\_\_\_ (if any).

#### ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge to the duty to disclose information

- which is material to patentability as defined in 37, Code of Federal Regulations, § 1.56

*(also check the following items, if desired)*

- ☐ and which is material to the patentability of this application, namely, information where there is a substantial likelihood that a reasonable examiner would consider it important in deciding whether to allow the application to issue as a patent, and

- ☐ In compliance with this duty there is attached an information disclosure statement in accordance with 37 CFR 1.98.

#### PRIORITY CLAIM (35 U.S.C. § 119)

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed.

*(complete (d) or (e))*

- (d) ■ no such applications have been filed.  
(e) ☐ such applications have been filed as follows.

*NOTE Where item (c) is entered above and the International Application which designated the U.S. itself claimed priority check Item (e), enter the details below and make the priority claim.*

#### A. PRIOR FOREIGN/PCT APPLICATION(S) FILED WITHIN 12 MONTHS (6 MONTHS FOR DESIGN) PRIOR TO THIS APPLICATION AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119

Country (or indicate if PCT)	Application Number	Date of Filing (day, month, year)	Priority Claimed Under 37 USC 119
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No
			<input type="checkbox"/> Yes <input type="checkbox"/> No

ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS  
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION

NOTE: If the application filed more than 12 months from the filing date of this application is a PCT filing forming the basis for this application entering the United States as (1) the national stage, or (2) a continuation, divisional, or continuation-in-part, then also complete ADDED PAGES TO COMBINED DECLARATION AND POWER OF ATTORNEY FOR DIVISIONAL, CONTINUATION OR CIP APPLICATION for benefit of the prior U.S. or PCT application(s) under 35 U.S.C. § 120.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>09/459,736</u>	<u>Dec. 13, 1999</u>	<u>Pending</u>
(App. Serial No.)	(Filing date)	(Status)
		(patented, pending, abandoned)
<u>08/742,373</u>	<u>Nov. 1, 1996</u>	<u>Patented</u>
(App. Serial No.)	(Filing date)	(Status)
		(patented, pending, abandoned)

POWER OF ATTORNEY

I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Ernest I. Gifford (Reg. No. 20,644)  
Allen M. Krass (Reg. No. 18,277)  
Irvin L. Groh (Reg. No. 17,505)  
Douglas W. Sprinkle (Reg. No. 27,394)  
Douglas J. McEvoy (Reg. No. 34,385)  
John G. Posa (Reg. 37,424)  
Mark D. Schneider (Reg. No. 43,906)

Thomas E. Anderson (Reg. No. 31,318)  
Ronald W. Citkowski (Reg. No. 34,732)  
Judith M. Riley (Reg. No. 30,311)  
Douglas L. Wathen (Reg. No. 41,369)  
Ellen S. Cogen (Reg. No. 38,109)  
Avery N. Goldstein (Reg. No. 39,204)  
Robert J. Morris (Reg. No. 33,196)

SEND CORRESPONDENCE TO:

John G. Posa  
GIFFORD, KRASS, GROH, SPRINKLE,  
PATMORE, ANDERSON & CITKOWSKI, P.C.  
280 N. Old Woodward Ave.  
Suite 400  
Birmingham, MI 48009

DIRECT TELEPHONE CALLS TO:

John G. Posa  
(734) 913-9300

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that

11/10/2000

10:38

GIFFORD KRASS → 17196321062

NO. 551

005

willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

## SIGNATURE(S)

Full name of sole inventor WILLIAM R. FRY

Inventor's signature

Date 11/10/00

Country of Citizenship US

Residence Colorado Springs, Colorado

Post Office Address 5690 Broadmoor Bluffs Dr.

Colorado Springs, Colorado 80906

CHECK PROPER BOX(ES) FOR ANY OF THE FOLLOWING ADDED PAGE(S)  
WHICH FORM A PART OF THIS DECLARATION

- ☐ Signature for third and subsequent joint inventors. Number of pages added \_\_\_\_\_  
\* \* \*
- ☐ Signature by administrator(trix), executor(trix) or legal representative for deceased or incapacitated inventor.  
Number of pages added \_\_\_\_\_  
\* \* \*
- ☐ Signature for inventor who refuses to sign or cannot be reached by person authorized under 37 CFR 1.47.  
Number of pages added \_\_\_\_\_  
\* \* \*
- ☐ Added pages to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application. Number of pages added \_\_\_\_\_  
\* \* \*
- ☐ Authorization of attorney(s) to accept and follow instructions from representative.  
\* \* \*

If no further pages form a part of this Declaration then end this Declaration with this page and check the following item

- ☒ This declaration ends with this page.